

# Homelift.

## Features:

- ▶ Compliance with Directive 95/16/EC and European Standard EN 81-2 or Directive 2006/42/EC
- ▶ Aluminum shaft structure in various finishes
- ▶ Manual or automatic doors
- ▶ Capacity range from 200kg to 450kg
- ▶ Speed up to 0.63m/sec
- ▶ Single phase or 3-phase
- ▶ Travel up to 12m (5 stops)
- ▶ Low noise and smooth operation
- ▶ Standard Automatic Emergency Operation


## Use:



Passenger Lifts.




Homelifts.



Panoramic Lifts.



Accessibility.

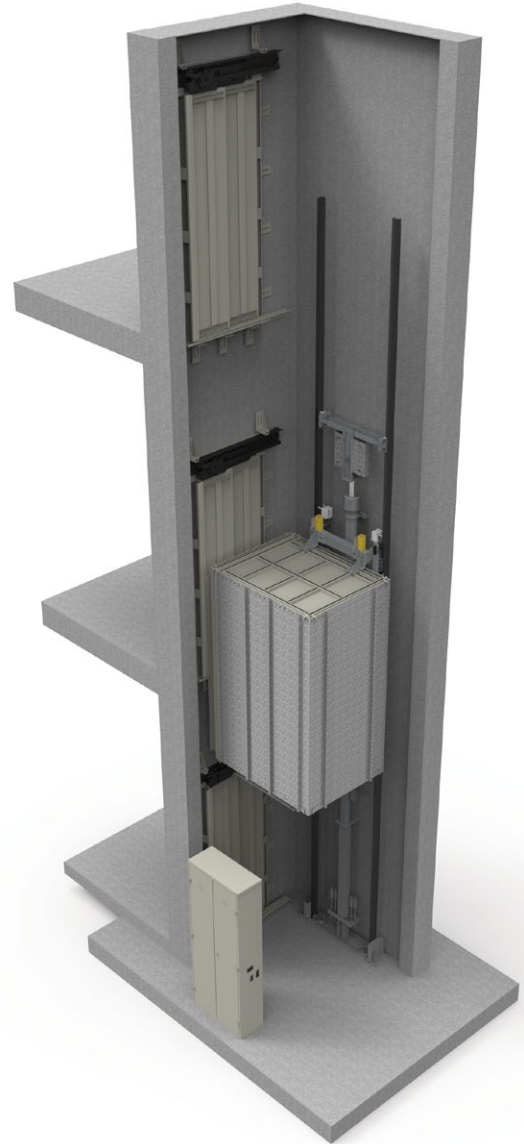

## Specifications

Homelift Type	Ad Astra	Ad Libitur
Rated Load (kg)	300	450
Max Travel (mm)	12.000	12.000
Car Door Type	Bus/Automatic	Bus/Automatic
Travel Speed (m/s)	Up to 0.63	Up to 0.15
Motor Power (kW)	Up to 9.6	Up to 2.9
Pit Depth (mm)	250	250
Headroom* (mm)	2.500/2.650	2.500/2.650
Directive/European Standard	95/16/EC EN81 series	2006/42/EC

\* For internal Car height 2100mm