

Traction MR.

Features:

- ▶ Compliance with Directive 95/16/EC and EN 81 series of European standards
- ▶ Capacity range from 200kg up to 20.000kg
- ▶ Speed up to 2 m/sec
- ▶ Travel up to 100m
- ▶ Standard Automatic Emergency Operation


Use:



Passenger Lifts.



High Rise Buildings.




Panoramic Lifts.



Cargo Lifts.



Car Lifts.

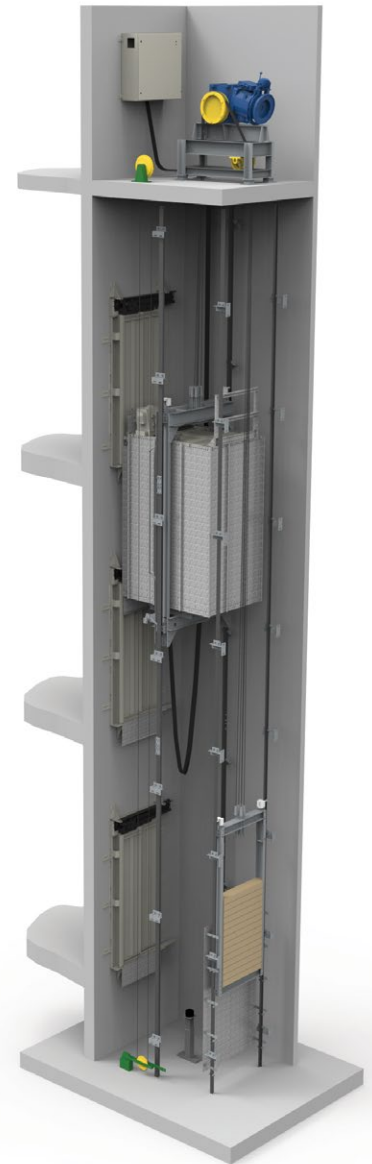

Specifications

Rated Load (kg)	300**	1.600**	3.000***
Passengers	4	21	40
Door Type	2PT	2PT	4PC
Door Opening (mm)	700x2.000	1.100x2.000	1.700x2.000
Car Depth (mm)	900	2.400	2.900
Car Width (mm)	1.000	1.400	2.000
Shaft Depth (mm)	1.500	3.000	3.300
Shaft Width (mm)	1.450	2.100	2.800
Pit Depth (mm)	1.200	1.200	1.700
Headroom* (mm)	3.350 (1.0m/s) 3.550 (1.6m/s)	3.350 (1.0m/s) 3.550 (1.6m/s)	3.500 (1.0m/s)

* For internal Car height 2100mm

** Counterweight at back side

*** Counterweight at side