

# Twin Jack Direct [1:1] Acting Hydraulic Lift.

## Features:

- ▶ Compliance with Directive 95/16/EC and European Standard EN 81-2 + A3
- ▶ Lifting Capacity up to 20.000kg
- ▶ Speed up to 0,63 m/sec
- ▶ Travel up to 18m (7 stops)
- ▶ Low noise and smooth operation
- ▶ Available with various cabin types
- ▶ Standard Automatic Emergency Operation
- ▶ Machine room at any location in relation to the lift shaft
- ▶ Double COP in case of through car arrangement

## Use:




Cargo Lifts.



Car Lifts.



Hospital Lifts.

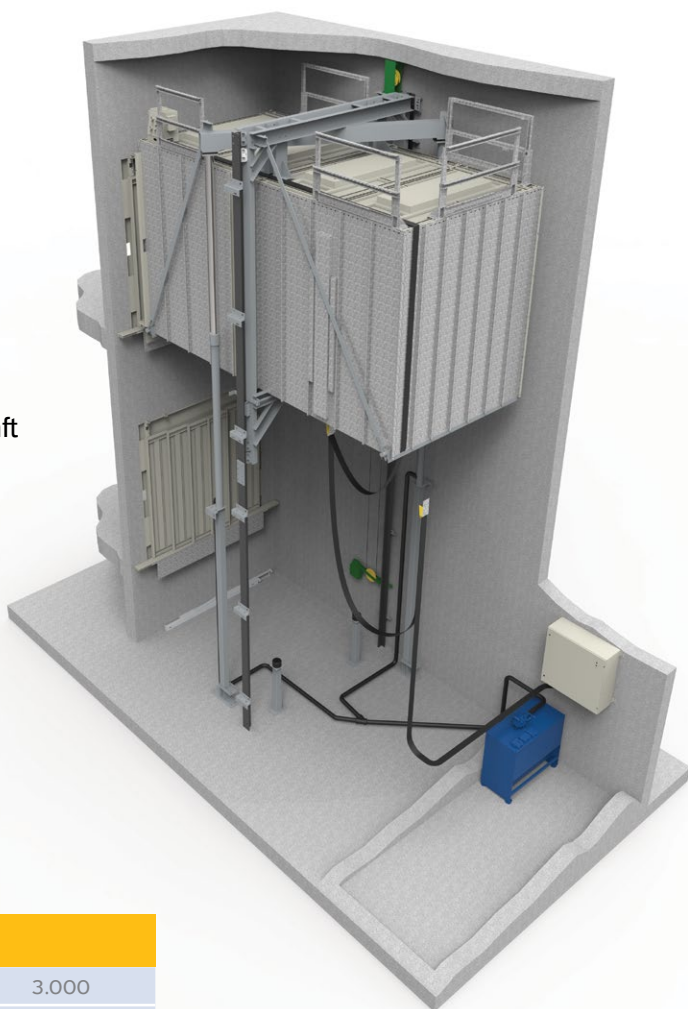

## Specifications

Rated Load (kg)	1.500	2.000	3.000
Door Type	4PC	4PC	4PC
Max Door Opening* (mm)	1.300x2.000	1.400x2.000	1.700x2.000
Car Depth (mm)	2.400	2.600	3.000
Car Width (mm)	1.400	1.600	1.900
Min Shaft Depth (mm) Single Entrance	2.800	3.000	3.400
Min Shaft Depth (mm) Through Car	2.950	3.150	3.550
Min Shaft Width (mm)	2.100	2.400	2.750
Pit Depth (mm)	1.200	1.200	1.200
Headroom* (mm)	3.300	3.300	3.300

\* For internal Car height 2100mm