

# ► **Range of Application**

## Goods Lift Platform

WITHOUT ATTENDANT

Machinery Directive 2006/42/EC | Conformity with EN 81-31:2010



## Features



- Platform without attendant  
Machine room or room-less
- Wide range of low pit / low headroom application  
Type examination certificate
- Simplified design - Robust construction
- Safe construction with safety gear and rapture valve  
Easy and safe maintenance
- Easy installation (Frame guides option)  
Low power consumption, low noise
- Warranty – increased lifetime



MAX. PLATFORM  
DIMENSIONS

2500mm (W) x 2000mm (D)




MAX. PLATFORM  
AREA

5m<sup>2</sup>



MAX.  
RATED LOAD

2000Kg



MAX.  
SPEED


0.3 m/s



MAX.  
TRAVEL

12000 mm

## PLAN VIEW

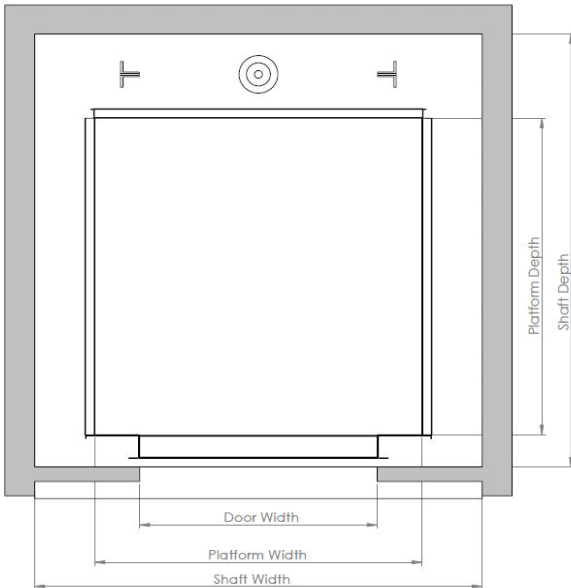

### IDEAL FOR



Industrial or Commercial

## APPLICATIONS

### DOORS SET UP

- » Single Entrance
- » Double Entrance\*
- » Three Entrances

### PLATFORM

- » Epoxy
- » Galvanized
- » Stainless Steel

Landing doors: Manual Hinged or Folding Shutters option

Plan View - Single Entrance

\* (Adjacent 90° or Through Car 180°)

## Specifications Goods Lift Platform

Type	GLP-300	GLP-500	GLP-750	GLP-1000	GLP-1250	GLP-1500	GLP-2000
Rated Load (Kg)	300	500	750	1000	1250	1500	2000
Max. Platform Area (m <sup>2</sup> )	1.5	2.5	3.75	5	5	5	5
Acting	12	12	12	12	12	12	12
Max. Speed (m/s)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
Max Travel (mm)	12000	12000	12000	12000	12000	12000	12000
Platform (mmXmm)	1000x1000	1250x1250	1500x1250	1500x1500	2000x1500	2000x2000	2500x2000
Shaft (mmXmm)	1200x1400	1450x1650	1700x1650	1700x1900	2200x1900	2200x2400	2700x2450
Min. Pit * (mm)	220	240	380	400	420	440	460
Min Headroom (mm)	2200	2200	2200	2200	2200	2400	2500
Max Platform Width (mm)	1500	1667	1875	2500	2500	2500	2500
Max Platform Depth (mm)	1000	1500	2000	2000	2000	2000	2000
Min Shaft Width for max PW (mm)	1700	1867	2075	2700	2700	2700	2700
Min Shaft Depth for max PD (mm)	1400	1900	2400	2400	2400	2400	2450

\* depends on the dimensions of the platform