
# IKOS T/20 ELECTRIC HOME LIFT

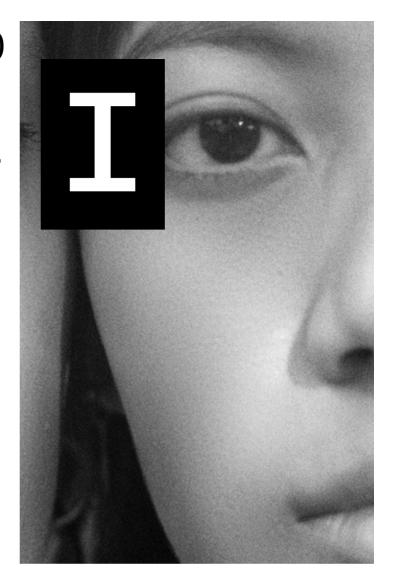

## IKOS T/20

# ELECTRIC HOME LIFT

# **INDEX**

DOPPLER'S VISION	4-5
IKOS SERIES' MISSION	6-7
T/20'S SOLUTION	8-11
GALLERY	12-17
T/20 ELECTRIC HOME LIFT	18-21
SCHÉMA SHAFT	22-29
CABIN MODELS	30-47
ACCESSORIES	48-71
TECHNICAL CATALOGUE	72-83




A productive life belongs in a home that supports you. Where your rules apply and our expertise listens. This is our promise.



# IKOS SERIES HOME LIFT SOLUTIONS

Between point A and point B, lies our passion for enhancing the way you move around your personal space. When movement and comfort are taken care of, you are free to deliver your best self and connect with the things or people you love.

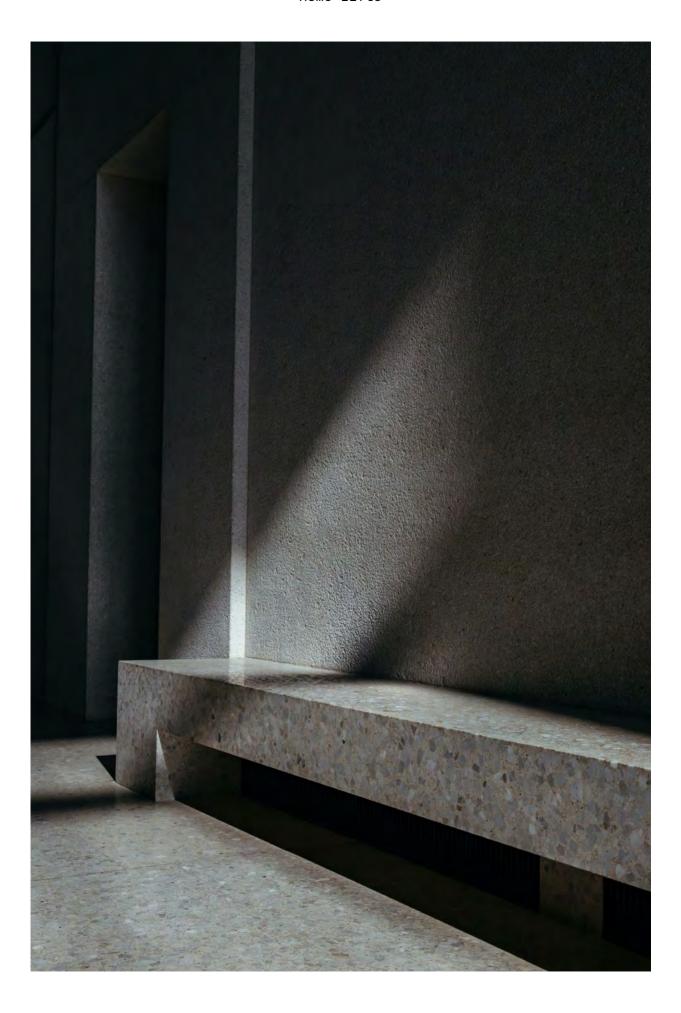

Moving forward, home together

#### Doppler IKOS SERIES

Committed to reinventing everyday life, from a global scale, to your very home. Responding effectively, through a sensory culture that can perceive your needs, looking upon them with a human eye.

Welcome home, with the IKOS Series.



### T/20'S SOLUTION

Stepping into your own home, should feel like it.
This is where your needs are met. Because, there, the world is designed according to your preferences.


This is what drives us into long-lasting solutions that support freedom of movement and complement the whole family's daily experience through efficiency achieved silently, manifesting serenity at home.

Moving forward, and home together.



THE CABIN IS CHROMA CONTAINING A PANEL MIRROR, FURTHER COMPLIMENTING THE EXTERIOR SURROUNDINGS. THE CEILING WAS CHOSEN AS TO MATCH THE CONTEMPORARY AESTHETICS OF THE LIVING ROOM, AS WERE THE COP AND LOP.



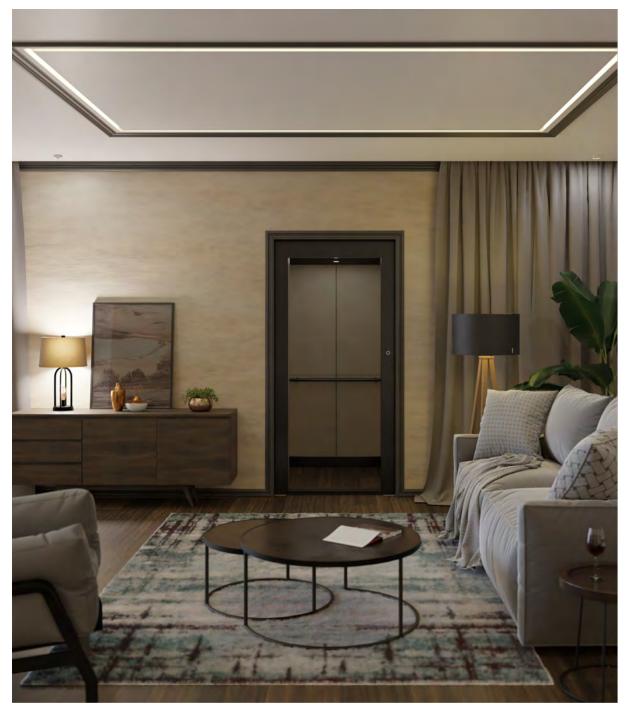


THE CABIN IS CHROMA WITH A SOFT TOUCH TEXTURE, COMPOSING A VISUAL RESULT INCORPORATED EVER SO NATURALLY INTO THE LIVING ROOM'S ENVIRONMENT, WITH A CEILING CHOICE THAT STANDS OUT AND AND A HIGHLY DISCREET LOP.




THE INDOOR PANORAMIC ELEVATOR WITH A STAINLESS STEEL SHAFT, RENDERING A REFINED MINIMALISTIC DESIGN STATEMENT, FUNCTIONING AS A SIGNIFICANT, ADDITIONAL COMPONENT TO THE AESTHETIC RESULT.



THE PANORAMIC CABIN, MANIFESTING A PERFECT VISUAL MATCH TO THE EXTERIOR ARCHITECTURE OF THE BUILDING. THE SHAFT IS METAL, MIMICKING THE BUILDING'S OVERALL AESTHETICS.

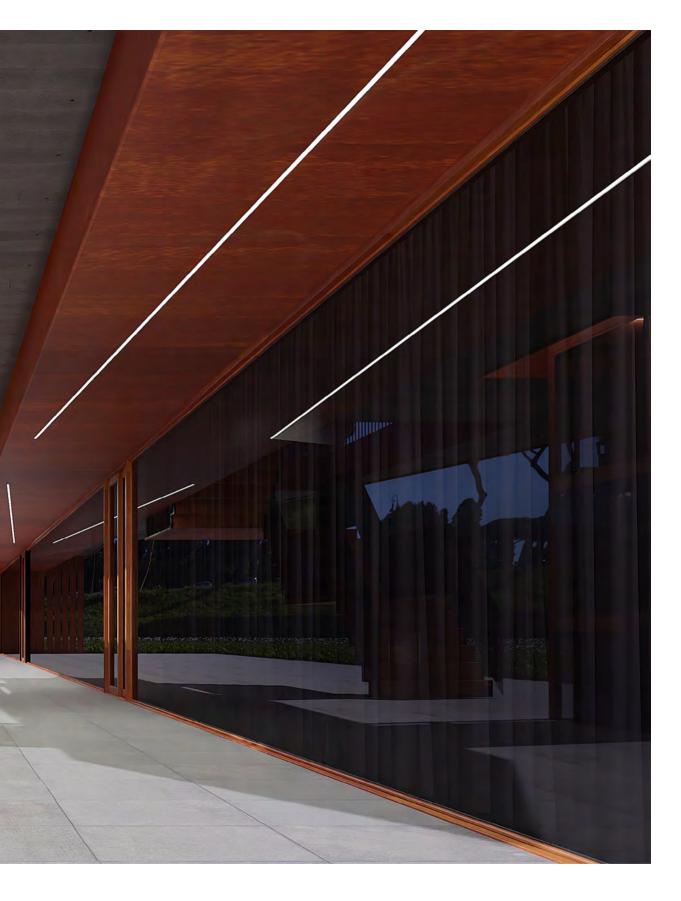

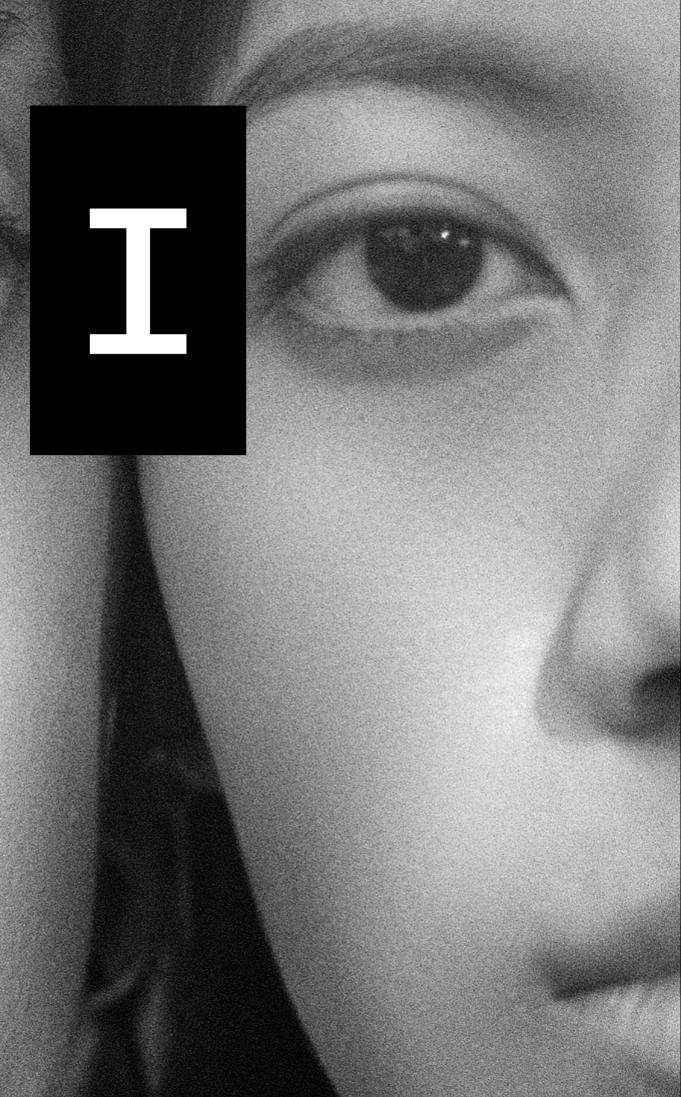

T/20

ELECTRIC HOME LIFT



250kg

## IKOS T/20

# ELECTRIC HOME LIFT

#### IKOS T/20

MIN. RATED LOAD

MAX. PERMISSIBLE LOAD	500kg
MAX. SPEED	0.15m/s, 0.3-0.4m/s (NON EU COUNTRIES)
MAX. LOADING AREA	2m²
MIN PIT	190mm (STANDARD PLASTIC FLOOR)
TRACTION DRIVEN	
PERFECTLY MATCHED WITH SCHÉMA STEEL	
FOLLOWING 2006/42/EC AND COMPLIANT WITH	EN81-41
AUTOMATIC OR SWING LANDING DOOR	
SILENT FUNCTION	
AUTOMATIC RESCUE OPERATION IN CASE OF P	OWER FAILURE
MINMUM ENERGY CONSUMPTION	291KWh
EASILY ACCESSIBLE FOR CLEANING	
EASILY ACCESSIBLE FOR CLEANING	



Moving forward, home together

# SCHÉMA SHAFT

A CULTURE OF SOLUTIONS THAT LAST AND A DRIVE FOR EXQUISITE DESIGN FIND THEIR OPTIMAL RESULT IN THE SCHÉMA STEEL SHAFT. CONTENTMENT, SAFETY AND EASE FOR ALL.

24 Schéma Shaft



FRAMED SAFETY GLASS ACCORDING TO EN 14449:2005 THICKNESS DIFFERS ACCORDING TO PROJECT SPECS INFO



SAFETY GLASS PINNED OR WITH SPIDER FITTINGS

INFO



500kg

# SCHÉMA SHAFT

#### SCH50

RATED LOAD

IN COMPLIANCE WITH	EN 1090
GLASS / FRAMED / PINNED OR WITH SPIDER FITTINGS	
STEEL / CHROMA / LIQUID PAINTED PANELS	
STAINLESS STEEL CLADDINGS	
INDOOR / OUTDOOR	

#### Glass panels



W3.10 01 CLEAR



W3.12 03 GREY TINTED



W3.13 04 BRONZE TINTED



W3.19 10 MIRASTAR



W3.20 11 BLACK FUME




W3.22 13 FLUTED SATIN CLEAR

#### Stainless Steel Panels



W4.1 SATIN/HL/SB/N4



W4.2 SUPER MIRROR N8



W4.36 BLACK SATIN/HL/SB/N4



W4.37 BLACK SUPER MIRROR N8

#### Powder Coating Steel Panels



W5.1 501 BLACK



W5.2 501 SILVER



W5.4 501 BRONZE

#### Liquid Paint Steel Panels



W6.4 810-M GRIGIO



W6.5 790-GRAFITE



W6.6 840-M ASH GREY




Moving forward, home together

## CABIN MODELS

MAKING YOUR HOME-LIFT AN EXTENSION OF YOUR PERSONAL TASTE.

COMMITTED TO ADDING CONTENTMENT INTO EVERY INTERACTION AND ELEVATING YOUR HOME'S VALUE.

32 Cabin Models

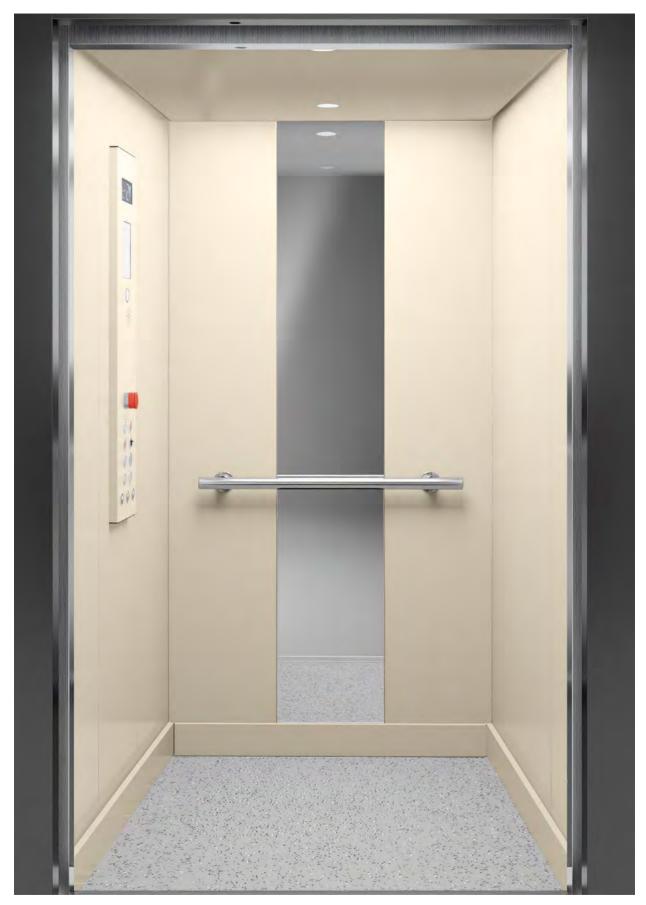

POWDER COATED OR LIQUID PAINTED STEEL FOR SIDE WALLS AND PERIPHERALS RAL 1013

CHROMA



STAINLESS STEEL FOR SIDE WALLS AND PERIPHERALS

INOX

34 Cabin Models



PERIPHERAL GLASS TRANSPARENCY
ONE OR TWO PANORAMIC SIDES APPLICABLE

PANORAMIC





RAL 7033

## **CHROMA**

HIGH QUALITY, SIMPLICITY AND FUNCTIONALITY CREATED IN ONE, FOR ALL.

#### CHROMA CABIN MODEL

FOUNDAT	TONAL L	INE								
POWDER	COATED	OR I	LIQUID	PAINTED	STEEL	FOR	SIDE	WALLS	AND	PERIPHERALS
BESPOKE	PRINTI	ING (	ON SIDE	ES AND F	LOOR					
ENTIRET	Y OF RA	AL CO	OLOR SY	/STEM						
STEEL /	CORNER	RS /	SKIRT	ING PERII	PHERAL	S				



# SIDE WALLS



W5.1 501 BLACK



W5.2 501 SILVER



W5.3 501 GOLD



W5.4 501 BRONZE



W5.5 7032 PEBBLE GREY



W5.6 7035 LIGHT GREY



W5.7 7042 TRAFFIC GREY



W5.8 9016 TRAFFIC WHITE

### Liquid Paint Texture Options



W6.10 CORTEN



W6.12 LEATHER



W6.14 SOFT TOUCH



W6.14 VINTAGE



## INOX

MINDFULLY DESIGNED FOR A CONTEMPORARY STYLE THAT STANDS THE TEST OF TIME.

### INOX CABIN MODEL

BRU:	SHED STAINLESS STEEL OR MIRROR
MUL.	TI-COLOR STAINLESS STEEL FINISHES
SPE	CIAL OR PATTERNED STAINLESS STEEL FINISHES



# SIDE WALLS




W4.1 SATIN/HL/SB/N4




W4.7 LEATHER




W4.12 GOLD SATIN/HL/SB/N4




W4.2 SUPER MIRROR N8



W4.8 DAMA



W4.13 GOLD SUPER MIRROR N8



W4.6 LINEN



W4.11 5WL



## **PANORAMIC**

INCORPORATING EXPERIENTIAL DESIGN INTO YOUR VERY HOME.

#### PANORAMIC CABIN MODEL

SECURI	GLASS
SCRATC	AND SHOCK RESISTANT
ONE OR	TWO PANORAMIC SIDES
FRAMED	OR FRAMELESS
STATNI F	ESS STEEL / CORNERS / SKIRTING PERIPHERALS



## SIDE WALLS



W4.1 SATIN/HL/SB/N4



W4.21 GOLD 4N AFP



W4.22 CHAMPAGNE SATIN/HL/SB/N4



W4.23 CHAMPAGNE SUPER MIRROR N8



W4.26 BRONZE SATIN/HL/SB/N4



W4.27 BRONZE SUPER MIRROR N8



W4.29 DARK BRONZE AFP



W4.38 DARK BLACK SATIN/HL/SB/N4



W4.39 DARK BLACK SUPER MIRROR N8

### Liquid Paint Texture Options



W6.7 CORTEN



W6.8 LEATHER



W6.9 SOFT TOUCH



W6.10 VINTAGE



Moving forward, home together

## **ACCESSORIES**

TAKING CUSTOMIZATION TO A DEEPER LEVEL THROUGH ACCESS INTO EVERY OPTION.

AS YOU PRESS THE LOP BUTTON, YOU'RE INVITED TO APPRECIATE ITS ENJOYABLE TOUCH AND THE LCD, BLACK TRICOLOR SCREEN AS YOUR LIFT ARRIVES. ELEGANCE, EVIDENT THROUGH THE COMPONENTS, CAREFULLY CURATED IN A UNIFIED PANEL. AS THE DOORS OPEN, YOU ARE LET INTO THE QUALITY OF THE IKOS HOME LIFT.

CONTACT
MARKETING@DOPPLER.GR
FOR YOUR BESPOKE
MATERIAL REQUESTS.



AVAILABLE IN STAINLESS STEEL SATIN / MIRROR / GOLD MIRROR DOWN FULL COLLECTIVE EN  $81\mbox{-}70$ 

A2.1.1 LS



AVAILABLE IN A VARIETY OF FINISHES LCD

A2.2.1 LF



BUTTON(S) IN DOOR FRAME FLUSH MOUNTED


A2.2.5 LFNP





SOL SOLID PANELS SIDE OPENING (L/R) CENTRAL OPENING ID PANELS

D1.1.1

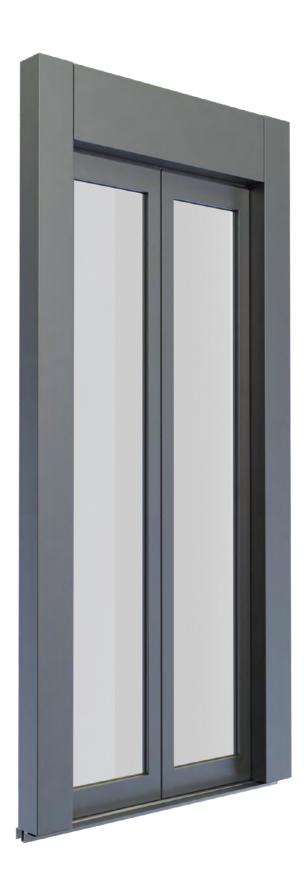



FRAMED GLASS PANELS SIDE OPENING (L/R) CENTRAL OPENING

D1.1.2









K11 SINGLE PANEL (1P) L/R





K12 SINGLE PANEL (1P) L/R







ALL RAL COLOURS AVAILABLE

K15 SINGLE PANEL (1P) L/R





K16 SINGLE PANEL (1P) L/R





MARYTH SINGLE PANEL (1P) L/R THERMALLY INSULATED DOOR





SOPHIA SINGLE PANEL (1P) L/R FIRE RATED DOOR EI 120 EW 60 CLASS EN 81.58

62 Door Knobs



KNOB A5.4



129SP A5.5







FC31 A8.28



FULL HEIGHT COLUMN
PICTOGRAMS AS PER EN 81-28
AVAILABLE IN A VARIETY OF FINISHES
BUTTONS AS PER EN 81-70
TFT OR IPL (DDA)

A1.1.1



AVAILABLE IN A VARIETY OF FINISHES BUTTONS ILLUMINATION COLOR RED, BLUE, WHITE PICTOGRAMS AS PER EN 81-28 TFT OR IPL

A1.2.1

68 Handrails



HR2 A5.1



HR3 A5.2



HR4 A5.3

70 Floors




G424 MERCURY F2.1



PF5 QUASAR F2.4



PF3 VENUS F2.3

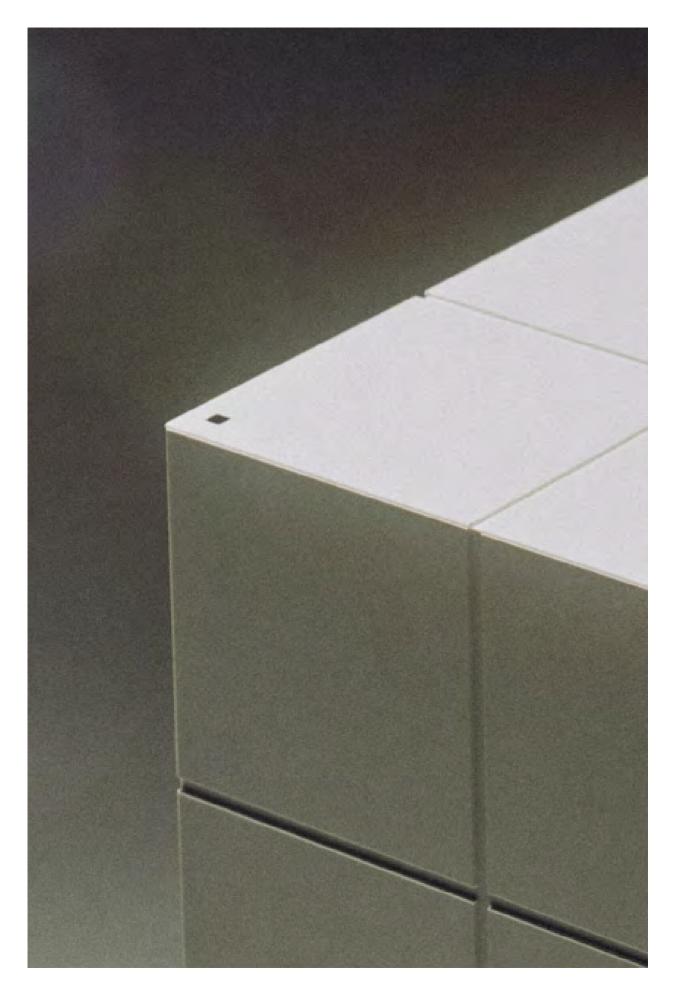

Moving forward, home together

### RANGE OF APPLICATION

MINDFULLY DELIVERING OPTIONS THAT SERVE FUNCTIONALITY AND BESPOKE REQUESTS FOR LONG-LASTING SOLUTIONS.

MAX SPEED	0.15m/s   0.3-0.4m/s (NON EU COUNTRIES)
MIN PIT	190mm (STANDARD PLASTIC FLOOR)
MIN HEADROOM-SWING DOOR	2400mm
MIN HEADROOM-AUTOMATIC DOOR	2550mm (UNDER CONDITIONS 2400mm)
CONTROLLER CABINET'S DIMENSIONS	400×250×2230mm
CANTILEVERED CAR SLING	
·	

NOMINAL DEMAND PER YEAR FOR NOMINAL VALUES AS SHOWN: 291 KWH

A:291

## ENERGY EFFICIENT CLASS

# 

#### Masonry-Swing Doors

#### SINGLE DOOR

Rated Load	Q	250	320	320	400	450	500(max)	(kg)
Cabin Width	CW	600	800	900	1100	1200	1200	(mm)
Cabin Depth	CD	1120	1200	1400	1400	1500	1650	(mm)
Shaft Width	SW	1120	1270	1370	1570	1670	1670	(mm)
Shaft Depth	SD	1220	1355	1555	1555	1655	1805	(mm)
Door Opening	DO	600	700	800	900	900	900	(mm)


#### SINGLE DOOR

Rated Load	Q	250	320	400	400	450	500(max)	(kg)
Cabin Width	CW	950	950	1300	1400	1500	1650	(mm)
Cabin Depth	CD	600	900	1000	1000	1200	1200	(mm)
Shaft Width	SW	1130	1130	1435	1535	1635	1785	(mm)
Shaft Depth	SD	1090	1390	1490	1490	1690	1690	(mm)
Door Opening	DO	800	800	900	900	900	1000	(mm)


#### ADJACENT DOORS

Rated Load	Q	250	320	400	400	450	500(max)	(kg)
Cabin Width	CW	600	800	1000	1200	1200	1200	(mm)
Cabin Depth	CD	1100	1200	1300	1200	1500	1650	(mm)
Shaft Width	SW	1090	1290	1490	1690	1690	1690	(mm)
Shaft Depth	SD	1280	1380	1480	1380	1680	1830	(mm)
Door Opening	D01	550	700	900	900	900	900	(mm)
Door Opening	D02	900	900	900	900	900	900	(mm)


Rated Load	Q	250	320	320	400	450	500(max)	(kg)
Cabin Width	CW	600	800	800	1100	1200	1200	(mm)
Cabin Depth	CD	1100	1200	1300	1400	1500	1650	(mm)
Shaft Width	SW	1120	1270	1270	1570	1670	1670	(mm)
Shaft Depth	SD	1300	1400	1500	1600	1700	1850	(mm)
Door Opening	DO	600	700	700	900	900	900	(mm)




SINGLE DOOR



ADJACENT DOORS





IKOS T/20

#### Masonry-Automatic Doors

#### SINGLE DOOR

Rated Load	Q	250	320	400	400	450	500(max)	(kg)
Cabin Width	CW	700	800	1000	1100	1200	1200	(mm)
Cabin Depth	CD	1200	1200	1300	1400	1400	1650	(mm)
Shaft Width	SW	1170	1270	1470	1570	1670	1670	(mm)
Shaft Depth	SD	1530	1530	1630	1730	1730	1980	(mm)
Door Opening	DO	650	700	850	900	950	950	(mm)


#### SINGLE DOOR

Rated Load	Q	250	320	400	400	450	500(max)	(kg)
Cabin Width	CW	1050	1300	1200	1100	1400	1650	(mm)
Cabin Depth	CD	600	800	1200	1200	1200	1100	(mm)
Shaft Width	SW	1185	1435	1335	1235	1535	1785	(mm)
Shaft Depth	SD	1265	1465	1865	1765	1865	1765	(mm)
Door Opening	DO	650	800	700	650	850	900	(mm)


#### ADJACENT DOORS

Rated Load	Q	320	320	400	400	400	500(max)	(kg)
Cabin Width	CW	1000	1000	1100	1200	1100	1100	(mm)
Cabin Depth	CD	1300	1200	1200	1200	1400	1650	(mm)
Shaft Width	SW	1665	1665	1765	1865	1765	1765	(mm)
Shaft Depth	SD	1655	1555	1555	1555	1755	2005	(mm)
Door Opening	D01	750	700	750	800	850	850	(mm)
Door Opening	D02	750	750	750	800	800	800	(mm)


Rated Load	Q	250	320	320	400	450	500(max)	(kg)
	01.1	700		1000	1.1.00	1000	1000	
Cabin Width	CW	700	800	1000	1100	1200	1200	(mm)
Cabin Depth	CD	1200	1200	1300	1400	1400	1650	(mm)
Shaft Width	SW	1170	1270	1470	1570	1670	1670	(mm)
Shaft Depth	SD	1750	1750	1850	1950	1950	2200	(mm)
Door Opening	DO	650	700	850	900	950	950	(mm)




SINGLE DOOR



ADJACENT DOORS





IKOS T/20

#### Steel Shaft-Swing Doors

#### SINGLE DOOR

Rated Load	Q	250	320	320	400	450	500(max)	(kg)
Cabin Width	CW	600	800	900	1100	1200	1200	(mm)
Cabin Depth	CD	1120	1200	1400	1400	1500	1650	(mm)
Shaft Width	SW	1240	1390	1490	1690	1790	1790	(mm)
Shaft Depth	SD	1314	1462	1662	1662	1762	1912	(mm)
Door Opening	DO	600	700	800	900	900	900	(mm)


#### SINGLE DOOR

Rated Load	Q	250	320	400	400	450	500(max)	(kg)
Cabin Width	CW	950	950	1300	1400	1500	1650	(mm)
Cabin Depth	CD	600	900	1000	1000	1200	1200	(mm)
Shaft Width	SW	1257	1257	1529	1629	1729	1879	(mm)
Shaft Depth	SD	1223	1523	1623	1623	1823	1823	(mm)
Door Opening	DO	800	800	900	900	900	1000	(mm)


#### ADJACENT DOORS

Rated Load	Q	250	320	400	400	450	500(max)	(kg)
Cabin Width	CW	600	800	1000	1200	1200	1200	(mm)
Cabin Depth	CD	1100	1200	1300	1200	1500	1650	(mm)
Shaft Width	SW	1223	1423	1623	1823	1823	1823	(mm)
Shaft Depth	SD	1387	1487	1587	1487	1787	1937	(mm)
Door Opening	D01	550	700	900	900	900	900	(mm)
Door Opening	D02	900	900	900	900	900	900	(mm)


Rated Load	Q	250	320	320	400	450	500(max)	(kg)
Cabin Width	CW	600	800	800	1100	1200	1200	(mm)
Cabin Depth	CD	1100	1200	1300	1400	1500	1650	(mm)
Shaft Width	SW	1240	1390	1390	1690	1790	1790	(mm)
Shaft Depth	SD	1420	1520	1620	1720	1820	1970	(mm)
Door Opening	DO	600	700	700	900	900	900	(mm)




SINGLE DOOR



ADJACENT DOORS





IKOS T/20

#### Steel Shaft-Automatic Doors

#### SINGLE DOOR

Rated Load	Q	250	320	400	450	450	500(max)	(kg)
Cabin Width	CW	700	800	1000	1100	1200	1200	(mm)
Cabin Depth	CD	1200	1200	1300	1400	1400	1650	(mm)
Shaft Width	SW	1290	1390	1590	1690	1790	1790	(mm)
Shaft Depth	SD	1624	1624	1724	1824	1824	2074	(mm)
Door Opening	DO	600	700	800	900	950	950	(mm)


#### SINGLE DOOR

Rated Load	Q	250	320	400	400	450	500(max)	(kg)
Cabin Width	CW	1050	1300	1200	1100	1400	1650	(mm)
Cabin Depth	CD	600	800	1200	1100	1200	1100	(mm)
Shaft Width	SW	1279	1529	1429	1329	1629	1879	(mm)
Shaft Depth	SD	1385	1585	1985	1885	1985	1885	(mm)
Door Opening	DO	600	800	700	650	850	850	(mm)


#### ADJACENT DOORS

Rated Load	Q	320	320	400	400	450	500(max)	(kg)
Cabin Width	CW	1000	1000	1100	1200	1100	1100	(mm)
Cabin Depth	CD	1300	1200	1200	1200	1400	1650	(mm)
Shaft Width	SW	1785	1785	1885	1985	1885	1885	(mm)
Shaft Depth	SD	1749	1649	1649	1649	1849	2099	(mm)
Door Opening	D01	750	700	750	800	850	850	(mm)
Door Opening	D02	750	750	750	800	800	800	(mm)


Rated Load	Q	250	320	320	400	450	500(max)	(kg)
Cabin Width	CW	700	800	1000	1100	1200	1200	(mm)
Cabin Depth	CD	1200	1200	1300	1400	1400	1650	(mm)
Shaft Width	SW	1290	1390	1590	1690	1790	1790	(mm)
Shaft Depth	SD	1844	1844	1944	2044	2044	2294	(mm)
Door Opening	DO	600	700	850	900	950	950	(mm)




SINGLE DOOR



ADJACENT DOORS





IKOS T/20

SEEN IS BETTER THAN IMAGINED. EXPERIENCE THE DESIGN OF YOUR HOME LIFT ON A DEEPER LEVEL AND BRING YOUR VISION TO LIFE

WITH THE ONLINE CABIN CONFIGURATOR.



OUR EXPERTISE IS EAGER TO LISTEN AND RESPOND. GET IN TOUCH.

HEADQUARTERS & FACTORY

POLYKASTRO INDUSTRIAL PARK 61200 GREECE

+30 23430 54000 (T) INFO@DOPPLER.GR (E)

THESSALONIKI OFFICE & SHOWROOM

5 GIALOPSOU EKTOROS ST. 56224 EVOSMOS THESSALONIKI GREECE

+30 23430 54000 (T)

ATHENS BRANCH

12 LASSANI ST. 12132 PERISTERI ATHENS GREECE

+30 210 341 6210 (T) INFOATH@DOPPLER.GR (E)

